



## EKL 22200

65W TDP Premium Cooler for INTEL<sup>®</sup>  
Socket LGA 17XX / 1851

### Optimum cooling performance for Intel<sup>®</sup> processors

#### Product description

The EKL 22200 consists of an extrusion profile and dissipates the heat of your processor ideally and reliably. Thanks to its compact height of just 60 mm, this cooler is ideal for all compact PC systems, workstations or even normal office PCs. The built-in fan has a 4-pin connection and can therefore be controlled manually via the mainboard. This enables an adjustable speed range of 500-1800 rpm. Thanks to the existing PWM signal, the fan operates depending on the utilisation of the CPU.

#### Main features

- ✓ Powerful top-flow design
- ✓ Simple and tool-free push-pin assembly for Intel<sup>®</sup> socket LGA 17XX
- ✓ High-performance thermal paste
- ✓ Quiet and low-vibration 92 mm PWM fan

Advice & ordering:

 +49 (0)7561 9837-0

 [info@ekl-ag.de](mailto:info@ekl-ag.de)



\* Thermal and mechanical compatibility may vary depending on the system used  
\*\* According to manufacturer specifications

[www.ekl-ag.de](http://www.ekl-ag.de)

# EKL 22200 Technical data



## Cooler properties

|                       |                               |
|-----------------------|-------------------------------|
| Retail article number | 22210021000                   |
| Item number bulk      | 22210121000                   |
| EAN Retail            | 4250280329766                 |
| EAN Bulk              | 4250280331370                 |
| Power loss            | 65W TDP                       |
| Material              | Aluminium                     |
| Weight                | 410 g                         |
| Packaging unit        | 27 Cooler / box               |
| suitable for          | INTEL® Socket LGA 17XX / 1851 |


## Fan properties

|                   |                   |
|-------------------|-------------------|
| Width             | 100 mm            |
| Length            | 100 mm            |
| Height            | 60 mm             |
| Speed min.        | 500 U/min         |
| Speed max.        | 1800 U/min        |
| Warehouse         | Hydraulic bearing |
| Operating voltage | 12 VDC            |
| Volume flow       | 55.4 m³/h         |
| Noise level min.  | 22.6 dB(A)        |
| Service life L10  | 40000 h by 40 °C  |



\* Thermal and mechanical compatibility may vary depending on the system used  
\*\* According to manufacturer specifications

## EKL 22200 Dimensions

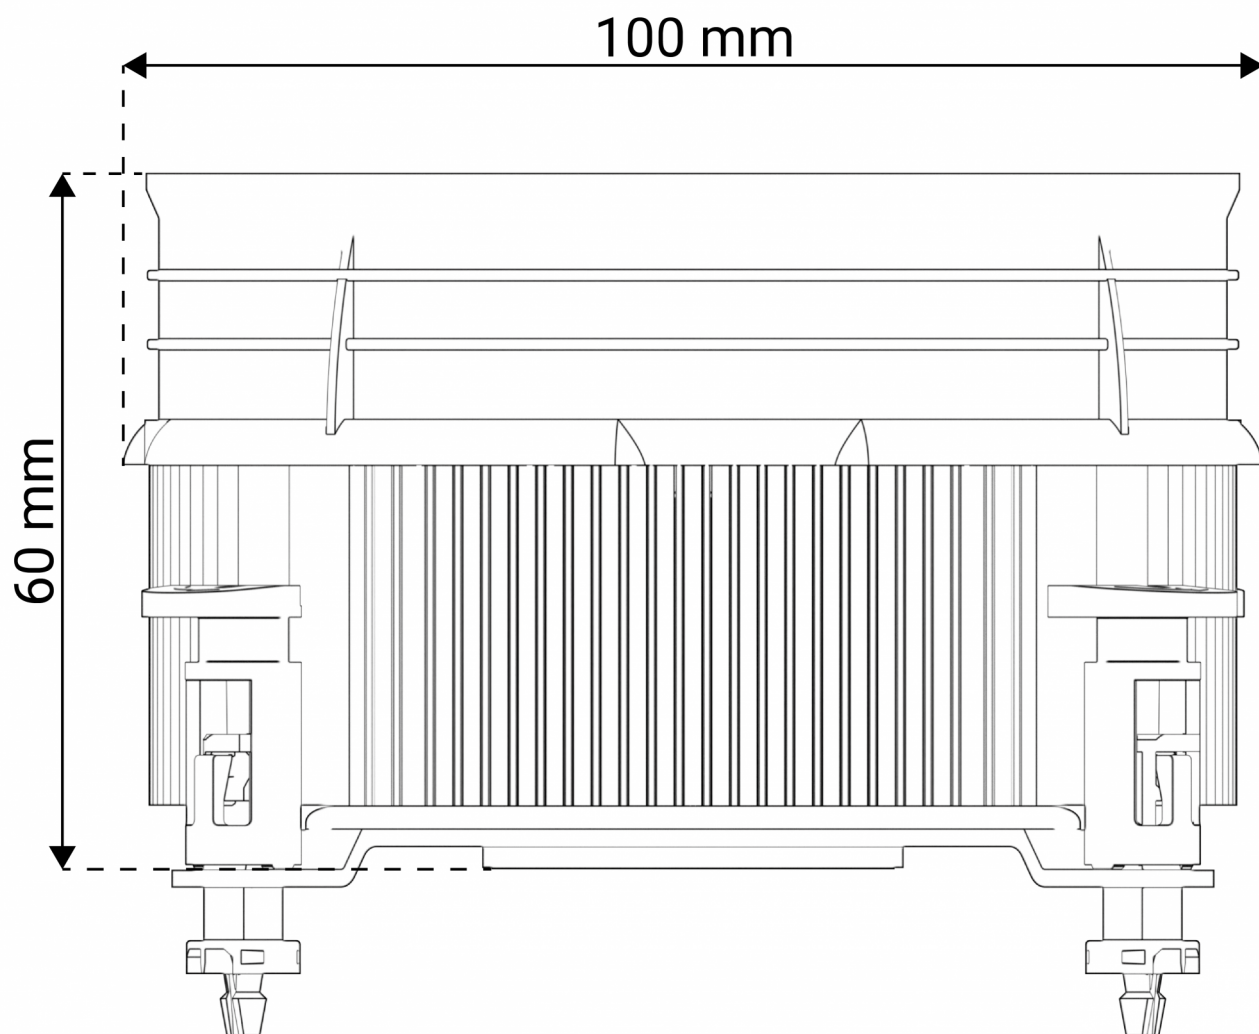

\* Thermal and mechanical compatibility may vary depending on the system used  
\*\* According to manufacturer specifications

[www.ekl-ag.de](http://www.ekl-ag.de)

**EKL**<sup>®</sup>  
electronics cooling